
# SHOP PRO® FXP

The Shop Pro® is a multipurpose shop floor tool, custom designed to remove water and contaminants from diesel fuel tanks, transfer diesel fuel, and prime diesel engines, including the engine line.

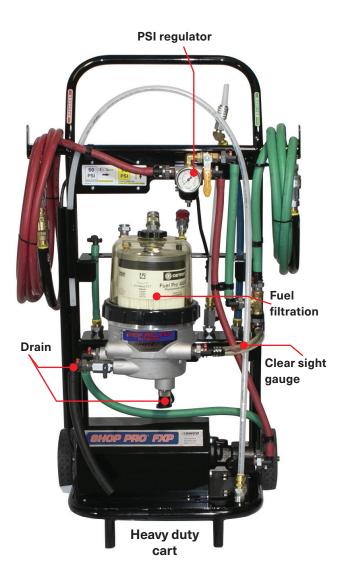

# **Applications**

## **Priming**

- Eliminates the use of hand priming pumps after performing maintenance
- Uses onboard fuel to prime engines and filters, avoids the hassle of keeping reserve fuel on hand

#### Fuel Transfer

- · Filters and transfers fuel in one operation
- · Transfers fuel when repairing tanks
- Transfers fuel for equipment being sold or taken out of service

### **Tank Cleaning**

- Removes contaminated fuel, sediment, and water from fuel tanks of diesel powered or from diesel storage tanks
- Cleans fuel tanks during service can be a value added service or a new revenue stream
- Eliminates downtime due to fuel contamination

#### **Features**

## Cart

- · Custom design with heavy duty construction
- · Portable and self-contained

#### **Electrical and Motor**

- UL® Listed, Closed electrical box and 120VAC connection uses standard extension cord
- 120 VAC Electric motor rated for continuous operation

## **Pump**

Heavy duty gear pump, up to 95 PSI

#### Filtration


 All Shop Pro® units filter fuel to 10 microns with three layer filtration

## **Adapters and hoses**


- No-drip fittings
- · Color-coded for function




# Operating the Shop Pro®

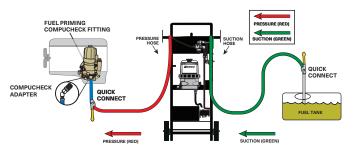

PRIMING WITH FILTRATION



**SWEEPING FUEL TANKS** 



TRANSFERRING FUEL WITH FILTRATION

# **Shop Pro® Filtration**



- Clear cover allows easy visual check of fuel condition
- Patented filter element design for extended life and maximum filtration performance
- Filter fuel to 10 microns

# **Specifications**

Height (cart)	41 inches
Depth (cart & wheels)	17 inches
Width (cart & wheels)	23 inches
Weight	74 lbs
Electric motor	120 VAC 60 HZ, UL Listed
Pump	Heavy duty, gear driven
Flow rate	150 GPH

# **Shop Pro® Part Numbers**

For help ordering, please contact Customer Service at (800) 328-2611

## **Regulator Options**

- 95/50 PSI setting for priming on DD5, DD8, DD13, DD15, and DD16 engines
- 95/40 PSI setting for all other priming uses and engine applications

Shop Pro® FXP 95/50	788050DAV02-10
Shop Pro® FXP 95/50 DDC	788050DDC01-10
Shop Pro® FXP 95/40	788050PAC01-10

# Warranty

- Five years on DAVCO fuel processor and cart
- · One year on motor and pump
- Note: Fittings, connectors, hoses and tubes are service items



Scan for product information



